

CAPP[®]

CATALOGUE



2026



Empowering your lab with precision and innovation

CAPP brand, knows that modern laboratories demand not just reliable tools, but cutting-edge solutions that ensure accuracy and efficiency in every experiment.

From pipetting solutions to a full range of benchtop equipment, our products are designed to meet the rigorous standards of scientific research, enabling you to focus on what truly matters: advancing your research and achieving reproducible results.

Our catalogue offers a broad selection of high-performance instruments for various laboratory applications, including molecular biology, microbiology, and cell culture. Each product is engineered for ease of use and optimised for seamless integration into your workflow. Whether it's minimising evaporation in PCR, ensuring consistent cell growth, or improving liquid handling accuracy, CAPP is committed to supporting your success in the lab.

Alongside our precision-engineered products, we offer extensive resources and expert guidance. You'll find practical tips and usage recommendations throughout this catalogue, helping you get the most out of every instrument. For more in-depth information, our online knowledge base provides additional resources and technical notes to enhance your laboratory's performance.

Discover how CAPP can elevate your laboratory's precision and productivity with innovative, high-quality solutions. Explore our catalogue and see the difference CAPP can make in your scientific journey.

We are proud to be your partner in excellence.

Index

ecopipette Single Channel Pipettes	6
CAPPSolo Single Multichannel Pipettes	8
CAPPBravo Single Multichannel Pipettes	10
CAPPAero384 Multichannel Pipettes	12
CAPPAero96 Multi Channel Pipettes	13
CAPPMicrobiology Single Channel Pipettes	14
Pipette Accessories	15
CAPPMaestro Electronic Pipettes	17
CAPPTempo Pipette Controller	18
CAPPForte Bottle-top Dispenser	19

Certification

We use state-of-the-art energy-efficient technology to manufacture eco-friendly products with minimal environmental impact. Sustainability drives every step, from sourcing green materials to durable designs and recyclable packaging.

As a Green Dot-certified company, we're part of a Europe-wide recycling initiative, making it easy for our German customers to recycle through the national system.



Sustainability

We model our commitment to sustainable production through our environmentally-friendly manufacturing practices and products.

We have a wide range of sustainable laboratory consumables expertly crafted to help you reach your sustainability goals while practicing excellent science.

100%
electrical injection moulding

= 40% less electricity consumption
compared to hydraulic machines



100%
recycled plastic

in production of CAPP rack boxes



100%
reusable racks

suitable for multiple
autoclaving cycles



65%
space saved

when using a reload system
- reducing packaging and transport



59%
plastic saved

when using a reload system



Zero
additional plastic ingredients

packs, inserts and reloads are made
entirely from recyclable polypropylene



Unlimited
upcycling options

for reusing tip racks as
storage solutions





SINGLE CHANNEL PIPETTES

Each ecopipette is carefully manufactured to high standards to extend its useful life and minimise the environmental impact of frequent disposal of laboratory pipettes. Featuring an interchangeable counter mechanism, which is unique to the Ecopipette, users can quickly switch between different volume capacities without having to change their pipette. This helps to protect the environment as fewer pipettes are needed.

Features

- ▣ Robust design includes metal tip base
- ▣ Interchangeable fixed and variable counter-mechanism
- ▣ Double O-rings for optimal tip seal and universal compatibility with broad range of tips
- ▣ Fully autoclavable pipette body, except volume knob
- ▣ Easy volume control through volume controller that requires 50% fewer turns
- ▣ Lockable volume controller
- ▣ Display is fully visible during hand-held operations
- ▣ Reduced need for force during aspiration and dispensing
- ▣ Large ejection pad for easy tip ejection
- ▣ Colour-coded pipette counter for quick selection of correct volume for liquid transfer



Double O-ring



Metal components



Interchangeable volume knobs



**2 YEAR
Warranty**

Autoclavable

**DoubleSafe
O-rings**

**Interchangeable
knobs**



Ordering Information

ecopipette Single Channel Pipettes - Variable Volume

Cat. No.	Channel	Volume	Increments	Inaccuracy %	Imprecision %	Colour
C02-1S	1	0.2-2 µL	0.02 µL	12.00 / 2.00	6.00 / 1.00	●
C02-1	1	0.2-2 µL (length as C10-1)	0.02 µL	12.00 / 2.00	6.00 / 1.00	●
C10-1	1	0.5-10 µL	0.1 µL	2.50 / 1.00	1.80 / 0.50	○
C20-1	1	2-20 µL	0.2 µL	5.00 / 1.00	1.50 / 0.30	●
C50-1	1	5-50 µL	0.5 µL	2.00 / 1.00	1.20 / 0.30	●
C100-1	1	10-100 µL	1.0 µL	2.50 / 0.70	1.00 / 0.20	●
C200-1	1	20-200 µL	2.0 µL	2.50 / 0.60	0.70 / 0.20	●
C1000-1M	1	100-1000 µL, w/ 2 µL increment	2.0 µL	2.00 / 0.80	0.60 / 0.20	●
C5000-1M	1	0.5-5 mL w/ 10 µL increment	10.0 µL	1.20 / 0.60	0.30 / 0.15	●
C10000-1	1	1-10 mL	20.0 µL	3.00 / 0.60	0.60 / 0.15	●

ecopipette Starter Kits

Cat. No.	Description
SK-03-E01	CAPP ecopipette Starter Kit: C10-1 / C100-1 / C1000-1 pipettes, C-05 stand and 3 racks of tips
SK-03-E02	CAPP ecopipette Starter Kit: C20-1 / C200-1 / C1000-1 pipettes, C-05 stand and 3 racks of tips



Interchangeable knobs

Ordering information can be found on pages 16-17





CAPPSolo Pipettes are cost effective and robust liquid-handling tools, designed for research, clinical and academic laboratories. They are available as single and multichannel pipettes.

Features

- ☐ Very light pipette chassis reduces risk of repetitive strain injuries
- ☐ Fine-tuned to ensure high level of pipetting accuracy, precision and long-term calibration stability
- ☐ Lock counter-mechanism prevents accidental rotation while pipetting
- ☐ Exchangeable colour inserts for easy identification of pipettes by user or volume capacities
- ☐ Crafted to withstand the toughest laboratory conditions, including chemical exposure, dropping and autoclaving



2 YEAR
Warranty

Fully
Autoclavable

UV
Resistant

Ordering Information

CAPPSolo Single Channel Pipette - Variable Volume

Cat. No.	Channel	Volume	Increments	Inaccuracy %	Imprecision %
S2-1	1	0.1-2.5 µL	0.01 µL	12.0 % / 2.5 %	6.00 % / 1.60 %
S10-1	1	0.5-10 µL	0.1 µL	2.5 % / 1.0 %	1.50 % / 0.80 %
S20-1	1	2-20 µL	0.1 µL	3.0 % / 0.9 %	2.00 % / 0.40 %
S50-1	1	5-50 µL	0.5 µL	2.0 % / 0.6 %	2.00 % / 0.30 %
S100-1	1	10-100 µL	0.5 µL	3.0 % / 0.8 %	1.50 % / 0.15 %
S200-1	1	20-200 µL	1.0 µL	2.0 % / 0.6 %	0.80 % / 0.15 %
S1000-1	1	100-1000 µL	5.0 µL	2.0 % / 0.6 %	0.70 % / 0.20 %
S5000-1	1	0.5-5 mL	50. µL	2.0 % / 0.5 %	0.60 % / 0.15 %
S5000-1-N	1	0.5-5 mL	50. µL	2.0 % / 0.5 %	0.60 % / 0.15 %
S10000-1	1	1-10 mL	100.0 µL	3.0 % / 0.6 %	0.60 % / 0.20 %
S10000-1-N	1	1-10 mL	100.0 µL	3.0 % / 0.6 %	0.60 % / 0.20 %

NEW Product

NEW Product

CAPPSolo Single Channel Pipette - Fixed Volume

Cat. No.	Channel	Volume	Increments	Inaccuracy %	Imprecision %
S5-1F	1	5 µL	-	1.3 %	1.20 %
S10-1F	1	10 µL	-	0.8 %	0.8 %
S20-1F	1	20 µL	-	0.6 %	0.50 %
S25-1F	1	25 µL	-	0.5 %	0.30 %
S50-1F	1	50 µL	-	0.5 %	0.30 %
S100-1F	1	100 µL	-	0.5 %	0.30 %
S200-1F	1	200 µL	-	0.4 %	0.20 %
S250-1F	1	250 µL	-	0.4 %	0.20 %
S500-1F	1	500 µL	-	0.3 %	0.20 %
S1000-1F	1	1000 µL	-	0.3 %	0.20 %
S2000-1F	1	2 mL	-	0.3 %	0.15 %
S2500-1F	1	2.5 mL	-	0.3 %	0.15 %
S5000-1F	1	5 mL	-	0.3 %	0.15 %
S10000-1F	1	10 mL	-	0.6 %	0.20 %

CAPPSolo Multichannel Pipettes

Cat. No.	Channel	Volume	Increments	Inaccuracy %	Imprecision %
S10-8	8	0.5 – 10 µL	0.1 µL	4.0 %/1.5 %	4.00 %/1.50 %
S100-8	8	10 – 100 µL	0.5 µL	3.0 %/1.0 %	2.00 %/0.70 %
S300-8	8	30 – 300 µL	1.0 µL	1.5 %/0.8 %	0.75 %/0.25 %
S10-12	12	0.5 – 10 µL	0.1 µL	4.0 %/1.5 %	4.00 %/1.50 %
S100-12	12	10 – 100 µL	0.5 µL	3.0 %/1.0 %	2.00 %/0.70 %
S300-12	12	30 – 300 µL	1.0 µL	1.5 %/0.8 %	0.75 %/0.25 %

CAPPSolo Starter Kit

Cat. No.	Description
SK-03-S01	3 pipettes S10-1 /S100-1 /S1000-1, C-05 stand, 3 racks of tips
SK-03-S02	3 pipettes S20-1 /S200-1 /S1000-1, C-05 stand, 3 racks of tips



*Only multichannel pipettes have a metal cone

CAPP[®] Bravo

SINGLE | MULTICHANNEL PIPETTES

CAPP Bravo pipettes combine lightweight ergonomic design, and the utmost accuracy and precision in an affordable package

Features

- Ultra lightweight construction
 - Metallic piston results in accurate liquid dispensing, delivering consistent, reliable results across all channels
- Built-in oversized volume indicator simplifies volume monitoring and makes precise adjustment particularly easy
- Durable construction ensures chemical resistance, thermal stability and resilience from accidental bumps or damage
- Long-term calibration retention, even after sterilising in an autoclave
 - Metal shaft with double O-rings for all multichannel volumes and 0.1-2 μ L, 0.5-10 μ L, 2-20 μ L single channel volumes
- Coloured caps and identification stickers enable the easy visual identification of pipettes or volume capacities



Oversized volume indicator



Volume lock












Colour-coded caps

2 YEAR
Warranty













Fully
Autoclavable

Ordering Information













CAPPBravo Single Channel Pipettes - Variable Volume

Cat. No.	Channels	Description	Increments	Inaccuracy %	Imprecision %	Colour
B02-1	1	0.1-2 µL	0.01µl	12.00 / 2.00	6.00 / 1.00	
B10-1	1	0.5-10 µL	0.02µl	2.50 / 1.00	1.80 / 0.50	
B20-1	1	2-20 µL	0.02µl	5.00 / 1.00	1.50 / 0.30	
B50-1	1	5-50 µL	0.1µl	2.00 / 1.00	1.20 / 0.30	
B100-1	1	10-100 µL	0.1µl	2.50 / 0.70	1.00 / 0.20	
B200-1	1	20-200 µL	0.2µl	2.50 / 0.60	0.70 / 0.20	
B1000-1	1	100-1000 µL	1.0µl	2.00 / 0.80	0.60 / 0.20	
B5000-1	1	1-5 mL	10.0µl	1.20 / 0.60	0.30 / 0.15	
B10000-1	1	1-10 mL	20.0µl	3.00 / 0.60	0.60 / 0.15	

CAPPBravo Single Channel Pipettes - Fixed Volume

Cat. No.	Channels	Description	Increments	Inaccuracy %	Imprecision %	Colour
B01-1F	1	1 µL	-	2.50	1.80	
B02-1F	1	2 µL	-	2.00	1.00	
B05-1F	1	5 µL	-	1.20	0.80	
B10-1F	1	10 µL	-	1.00	0.50	
B20-1F	1	20 µL	-	1.00	0.30	
B50-1F	1	50 µL	-	1.00	0.30	
B100-1F	1	100 µL	-	0.70	0.20	
B200-1F	1	200 µL	-	0.60	0.20	
B500-1F	1	500 µL	-	0.80	0.15	
B1000-1F	1	1000 µL	-	0.80	0.20	
B5000-1F	1	5 mL	-	0.60	0.15	
B10000-1F	1	10 mL	-	0.60	0.15	

CAPPBravo Multichannel Pipettes

Cat. No.	Channels	Description	Increments	Inaccuracy %	Imprecision %	Colour
 B10-8	8	0.5-10 µL	0.02 µl	5.00/2.00	3.60/1.00	
 B100-8	8	10-100 µL	0.1 µl	2.50/1.30	1.20/0.50	
 B300-8	8	30-300 µL	0.2 µL	1.66/1.40	0.60/0.30	
 B10-12	12	0.5-10 µL	0.02 µl	5.00/2.00	3.60/1.00	
 B100-12	12	10-100 µL	0.1 µl	2.50/1.30	1.20/0.50	
 B300-12	12	30-300 µL	0.2 µL	1.66/1.40	0.60/0.30	

CAPPBravo Starter Kits

Cat. No.	Description
SK-03-B01	Starter Kit including B10-1 / B100-1 / B1000-1 pipettes, C-05 stand, 3 racks of tips
SK-03-B02	Starter Kit including B20-1/B200-1/B1000-1 pipettes, C-05 stand, 3 racks of tips

CAPP[®] Aero384

MULTICHANNEL PIPETTES

CAPP Aero384 is the ideal multichannel pipette for 384-well plates, enabling fast, precise pipetting of 16, 48 or 64 wells simultaneously, as well as in one row with the 24- and 32-channel pipettes and no need for expensive automated equipment.

Features

- High-quality metal shaft and piston assembly designed for enhanced resistance to everyday laboratory conditions
- Metallic construction of the piston assembly results in accurate and precise performance across all channels
- Easy volume adjustment through controller that requires 50% fewer turns
- Colour-coded pipette counter for quick volume selection for liquid transfer
- Ergonomic tip ejection lever with minimal thumb effort required to offload tips
- Interchangeable fixed and variable counter-mechanism
- Fully autoclavable pipette body, except volume knob
- Display is fully visible during hand-held operations
- Lightweight ergonomic construction
- Lockable volume controller


**2 YEAR
Warranty**

**Interchangeable
knobs**

**Fully
Autoclavable**

CAPP Aero384 Tips

Ordering information can be found on page 24



Ordering Information

CAPP Aero 384 Multichannel Pipettes - Variable Volume

Cat. No.	Channel	Description	Increments	Inaccuracy %	Imprecision %	Colour
C02-16	16	0.2-2 µL		4.00	2.00	●
C10-16	16	0.5-10 µL		2.00	1.00	○
C50-16	16	5-50 µL		1.40	0.60	●
C10-24	24	0.5-10 µL		2.00	1.00	○
C50-24	24	5-50 µL		1.40	0.60	●
C10-32	32	0.5-10 µL		4.00	2.00	○
C10-48	48	0.5-10 µL		4.00	2.00	○
C10-64	64	0.5-10 µL		4.00	2.00	○

The CAPP Aero96 multichannel pipette combines the accuracy and precision of a single-channel pipette across all channels with ergonomic aspects that minimise thumb strain, a common cause of repetitive stress injuries during multichannel pipetting.

Features

- ☑ External ejection lever reduces thumb strain for easier tip mounting and ejection
- ☑ Double O-rings ensure tip placement on nose cone requires only light pressure
- ☑ Lightweight ergonomic construction
- ☑ Robust design through aluminium and metal tip cones
- ☑ Stainless steel pistons ensure stability and a constantly reliable, precise performance
- ☑ Colour-coded pipette counter for quick selection of the right volume for liquid transfer
- ☑ Interchangeable fixed and variable counter-mechanism
- ☑ Fully autoclavable pipette body, except volume knob
- ☑ Easy volume control through volume controller that requires 50% fewer turns
- ☑ Lockable volume controller
- ☑ Display is fully visible during hand-held operations



DoubleSafe
O-rings

Interchangeable
knobs

Fully
Autoclavable

2 YEAR
Warranty

Ordering Information

CAPP Aero 96 Multichannel Pipettes - Variable Volume

Cat. No.	Channel	Volume	Increments	Inaccuracy %	Imprecision %	Colour
C10-8	8	0.5-10 µL	0.1 µL	5.00 / 2.00	3.60 / 1.00	○
C20-8	8	2-20 µL	0.2 µL	5.00 / 2.00	3.60 / 1.00	●
C50-8	8	5-50 µL	0.5 µL	3.20 / 1.40	1.60 / 0.60	●
C100-8	8	10-100 µL	1.0 µL	2.50 / 1.30	1.20 / 0.50	●
C200-8	8	20-200 µL	2.0 µL	1.80 / 1.20	0.80 / 0.40	●
C300-8	8	30-300 µL	2.0 µL	1.66 / 1.40	0.60 / 0.30	●
C10-12	12	0.5-10 µL	0.1 µL	5.00 / 2.00	3.60 / 1.00	○
C20-12	12	2-20 µL	0.2 µL	5.00 / 2.00	3.60 / 1.00	●
C50-12	12	5-50 µL	0.5 µL	3.20 / 1.40	1.60 / 0.60	●
C100-12	12	10-100 µL	1.0 µL	2.50 / 1.30	1.20 / 0.50	●
C200-12	12	20-200 µL	2.0 µL	1.80 / 1.20	0.80 / 0.40	●
C300-12	12	30-300 µL	2.0 µL	1.66 / 1.40	0.60 / 0.30	●

CAPP[®] Microbiology

SINGLE CHANNEL PIPETTES

The CAPP Microbiology single channel pipette is designed for microbiology testing in the food industry, the environment and in public institutes. It is supplied with three fixed volume knobs and a modified tip cone geometry suitable for use with straw tips, enabling it to handle viscous liquids and 1:10 dilutions effortlessly and precisely.

Features

- ▣ Extended reach for convenient pipetting of difficult-to-reach samples
- ▣ Rotation-free volume selection ensures quick and easy adjustments without the risk of missetting the volume
- ▣ Pre-set calibrated volume controllers (100 µL/900 µL/1000 µL) for consistent, accurate measurements
- ▣ Fully autoclavable for easy sterilisation and reuse in sterile environments
- ▣ Robust metallic construction to assure a longer durability



Ordering Information

CAPPMicrobiology Single Channel Pipettes (for use with sterile straws)

Cat. No.	Channel	Volume	Increments	Inaccuracy %	Imprecision %
C1000-1BS	1	100/900/1000 µL	-	1.50 / 0.80	1.50 / 0.40



CAPPMicrobiology Straw Tips

Cat. No.	Description	Volume	Length	Sales Unit
4170807	Straw tip, sterile	1.1 mL	190 mm	40x25 pcs.

CAPP offers a comprehensive selection of practical accessories to complement and enhance the functionality of its full line of pipettes.

Volume knobs


- Pre-calibrated interchangeable, variable and fixed volume knobs
- Allow users to use one pipette with many fixed volume knobs to substantially reduce cost. Now, instead of four fixed volume pipettes, for example, user can buy one CAPP pipette and four inexpensive knobs to achieve the same precise results.

Pipette Stands

- Delivers optimal storage solutions for laboratories
- Options hold between 3 and 6 mechanical pipettes

Pipette Filters

- An economical solution to eliminate “splash effects” and will substantially reduce risk of sample and shaft contamination

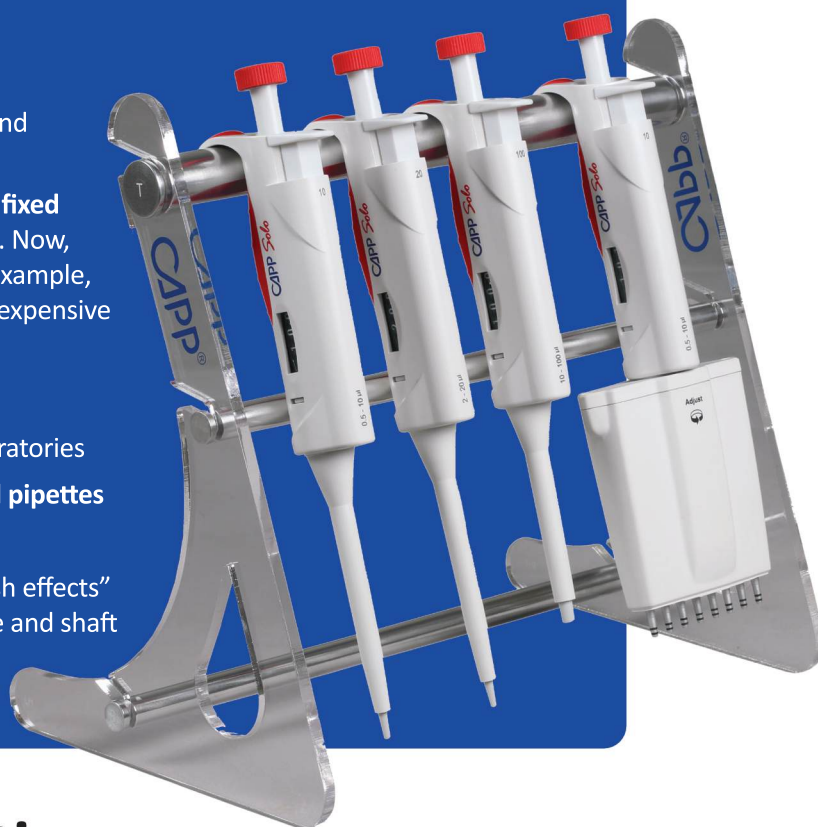

Ordering Information

Fixed Volume Knobs - for CAPP ecopipette, CAPP Aero 96 and CAPP Aero 384

Cat. No.	Volume	Use with pipette volumes	Colour
02-FE-1	1 µL	0.2-2 µL	●
02-FE-2	2 µL	0.2-2 µL	●
10-FE-5	5 µL	0.5-10 µL	○
10-FE-10	10 µL	0.5-10 µL	○
20-FE-10	10 µL	2-20 µL	●
20-FE-20	20 µL	2-20 µL	●
50-FE-20	20 µL	5-50 µL	●
50-FE-25	25 µL	5-50 µL	●
50-FE-50	50 µL	5-50 µL	●
100-FE-30	30 µL	10-100 µL	●
100-FE-50	50 µL	10-100 µL	●
100-FE-100	100 µL	10-100 µL	●

Fixed Volume Knobs for CAPP ecopipette, CAPP Aero 96 and CAPP Aero 384

Cat. No.	Volume	Use with pipette volumes	Colour
200-FE-100	100 µL	20-200 µL	●
200-FE-200	200 µL	20-200 µL	●
300-FE-300	300 µL	30-300 µL	●
1000-FE-50	50 µL	10-50 µL	●
1000-FE-100	100 µL	50-100 µL	●
1000-FE-200	200 µL	10-200 µL	●
1000-FE-500	500 µL	100-1000 µL	●
1000-FE-1000	1000 µL	100-1000 µL	●
5000-FE-1000	5000 µL	1-5 mL	●
5000-FE-5000	5000 µL	1-5 mL	●
10000-FE-10000	10000 µL	10 mL	●
XXX-FE-YYY	Other fixed volume controllers, ecopipette		



C-01



C-04



C-05



C-06



00392-1

Variable Volume Knobs for CAPP ecopipette, CAPP Aero 96 and CAPP Aero 384

Cat. No.	Volume	Use with pipette volumes	Increment	Colour
2-VZ	0.2-2 µL	0.2-2 µL	0.02 µL	●
10-VZ	0.5-10 µL	0.5-10 µL	0.1 µL	○
20-VZ	2-20 µL	2-20 µL	0.2 µL	●
50-VZ	5-50 µL	5-50 µL	0.5 µL	●
100-VZ	10-100 µL	10-100 µL	1.0 µL	●
200-VZ	20-200 µL	20-200 µL	2.0 µL	●
300-VZ / 1	30-200 µL	30-300 µL	2.0 µL	●
300-VZ	125-300 µL	30-300 µL	2.0 µL	●
1000-VZ-M	100-1000 µL	100-1000 µL	2.0 µL	●
5000-VZ-M	500-5000 µL	500-5000 µL	10.0 µL	●
10000-VZ-M	1000-10000 µL	1000-10000 µL	20.0 µL	●

Pipette Stands

Cat. No.	Description
C-01	Combi stand (2 modules) for up to 3 mechanical pipettes, except CAPPBravo
C-04	Pipette stand for up to 4 CAPP Maestro pipettes or all mechanical pipettes
C-05	Pipette stand for up to 5 CAPP mechanical pipettes, all models
C-06	Pipette stand for up to 6 CAPP mechanical pipettes, except CAPPBravo
00392-1	Block for 4 volume controllers

Pipette Filters

Cat. No.	Use with pipette	Pipette Volume	Sales Unit
C1000-1-FT	CAPP ecopipette	100-1000 µL	Bag / 50 pcs.
C5000-1-FT	CAPP ecopipette	1-5 mL	Bag / 50 pcs.
B510 mL-25-FT	CAPPBravo	1-5 mL and 1-10 mL	Bag / 25 pcs.

CAPP Maestro electronic single channel pipettes are user-friendly digital pipettes that will optimise your serial work. They come equipped with advanced functions such as multi-dispensing, dilution and mixing.

Features

- ☑ Lightweight construction and ergonomic design with a wide hook allows you to hold the pipette in your hand, without the need to “grab” it
- ☑ Large tip ejector works as a rest for your thumb
- ☑ Fully-coloured OLED display with better contrast and a greater screen refresh rate in comparison to other LCD screens and less power consumption compared to other displays
- ☑ Optimised serial work with advanced functions such as multi-dispensing, dilution and mixing
- ☑ For routine laboratory work, you can simply save your favourite protocols and switch from one to another with just two clicks
- ☑ Calibration and password-setting functions enable you to maintain precise measurements and secure user access.
- ☑ Easy operation through the user-friendly graphic intuitive interface
- ☑ Long lasting performance through the use of lithium ion batteries



OLED display



Large tip ejector



Hook

2 YEAR
Warranty

Ordering Information

Cat. No.	Channel	Volume	Increments	Inaccuracy %	Imprecision %
M10-1	1	0.2-10 µL	0.01 µL	2.50 / 1.00	1.80 / 0.50
M100-1	1	5-100 µL	0.1 µL	2.50 / 0.70	1.00 / 0.20
M200-1	1	10-200 µL	0.1 µL	2.50 / 0.60	0.70 / 0.20
M1000-1	1	50-1000 µL	1.0 µL	2.00 / 0.80	0.60 / 0.20
M5000-1	1	500-5000 µL	5.0 µL	2.40 / 0.60	0.60 / 0.15

The CAPP Tempo pipette controller is characterised by precision and user-friendliness, it improves performance and reliability in various laboratory applications and is therefore ideal for efficient and accurate pipetting of small and large volumes.

Features

- ▣ Digital LED display shows battery status and aspiration/dispensing speed, flashes when battery is low and turns off after 20 seconds of non-use
- ▣ Adjustable Speed with six different speed levels for both aspiration and dispense modes
- ▣ Electronic Brake System (EBS) enables quick and precise aspiration of the required volume
- ▣ Equipped with a lithium ion battery that allows 8 hours of uninterrupted work when fully charged
- ▣ Compatible with Plastic or Glass pipettes



Digital LED display

2 YEAR
Warranty



Ordering Information

Cat. No.	Description	Volume	Cone Colour
T100-B	CAPPTempo Pipette Controller	0.1-100 mL	blue

CAPP Tempo Accessories

Cat. No.	Description
T100-CS	Charging Stand

Find comprehensive information about our Serological Pipettes on page 38




CAPP Forte bottle top dispenser is the ideal choice for handling strong and corrosive chemicals. Made of highly chemical-resistant materials, such as PTFE, PFA, borosilicate and platinum, CAPP Forte Bottle-Top Dispenser is the ideal choice for dispensing bases, acids and solvents.

Features

- Positive displacement piston is ideal for many problematic media, such as crystallising, viscous, foaming or vaporising liquids, it removes the liquid completely through the tightly fitting piston that wipes the walls of the glass cylinder completely clean
- Unique wiping seal eliminates swelling and freezing of piston
- Locking the 3-way valve disables the dispensing function, preventing unintentional reagent flow and makes it possible to drain the system without removing the unit from the bottle
- The rapid prime system channels the reagent back into the bottle, eliminating reagent waste and increasing user safety
- Slide-and-lock volume adjustment allows an easy operation, the volume can be adjusted quickly and precisely and can be used for both left-handed and right-handed
- The discharge tube is turnable, making the bottle label visible at any time
- The telescope intake tube is easily adjustable, fitting reagent bottles without cutting
- PP-adapters for the most common bottle sizes are supplied with the instrument
- Autoclavable at 121° C / 250° F

Fully
Autoclavable

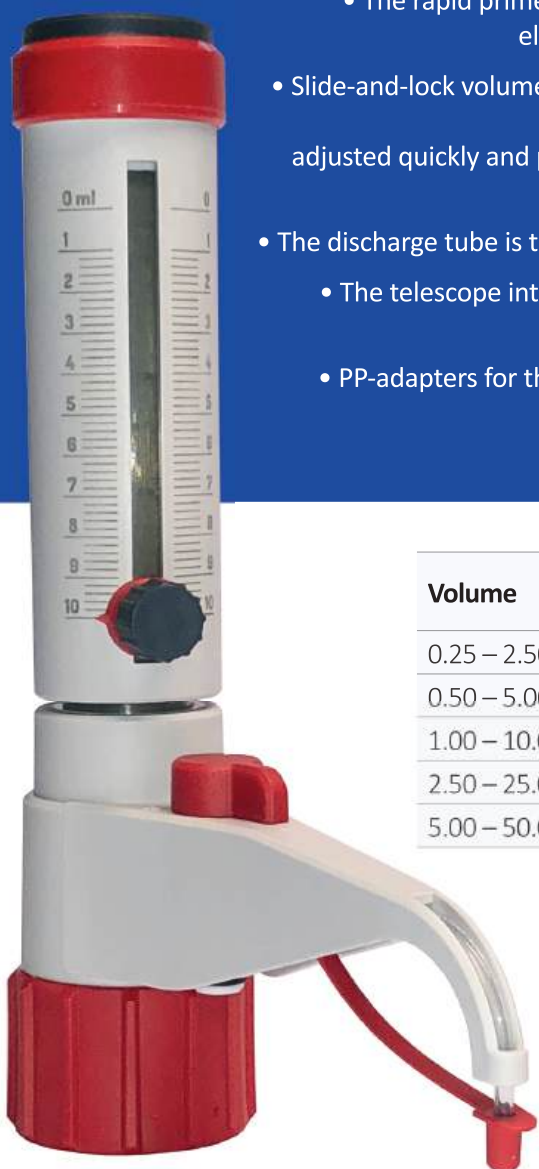

Specifications

Volume	Volume steps	Thread	Adapters GL	Accuracy %	Precision %
0.25 – 2.50 mL	0.05 mL	GL 32	28, 40, 45	0.6%	≤0.1%
0.50 – 5.00 mL	0.10 mL	GL 32	28, 40, 45	0.5%	≤0.1%
1.00 – 10.00 mL	0.20 mL	GL 32	28, 40, 45	0.5%	≤0.1%
2.50 – 25.00 mL	0.50 mL	GL 45	38, 40, 38/32	0.5%	≤0.1%
5.00 – 50.00 mL	1.00 mL	GL 45	38, 40, 38/32	0.5%	≤0.1%

Ordering Information

Cat. No.	Volume
CF2-1	0.25-2.5 mL
CF5-1	0.5-5 mL
CF10-1	1-10 mL
CF25-1	2.5-25 mL
CF50-1	5-50 mL



Handwriting practice lines consisting of 28 horizontal dotted lines.



AHN Biotechnologie GmbH
Uthleber Weg 14
99734 Nordhausen
Germany
Tel. +49 (0) 3631 65242-0
Fax. +49 (0) 3631 65242-90
contact@ahn-bio.com

www.ahn-bio.com



Distributed by

